

# Roof terrace system, pine finish – GEL+VEA/B/C



The VELUX roof terrace system can be installed in roof pitches between 35° and 53°. The system offers the possibility of creating a roof terrace with access from the building. The number of units installed is according to individual wishes. VELUX do not supply the exterior terrace weathering or railing elements.

## Application

The system consists of:

**GEL:** The top-hung top element opens 45°, barrel bolt for locking the sash in cleaning position, ventilation flap with air filter, control bar.

**VEA:** Side-hung bottom element opens 90° and is hinged on the left hand side seen from the outside.

**VEB:** Side-hung bottom element opens 90° and is hinged on the right hand side seen from the outside.

**VEC:** Fixed bottom element.

The appropriate flashing and the EBY adjustable support trimmer are also supplied as part of the system.

## Features



Roof terrace system.

GEL can be opened by means of a handle at the bottom sash. The window opens up to 45°.

## Operation

The control bar on GEL is used for operating the ventilation flap or for fully rotating the sash for cleaning the exterior pane.

The bottom element is opened by means of a handle at the side sash. When both the top and the bottom element are open, there is free access to the roof terrace.

10 year VELUX guarantee.

## Guarantee

Roof terrace system can be combined with:

**Flashings for**  
• Combi installation



**Interior sunscreening**

- Blackout blinds
- Roller blinds
- Pleated blinds
- Venetian blinds



**Installation products**

- Insulation collar
- Underfelt collar
- Vapour barrier



**Exterior sunscreening**

- Awning blind – for top element GEL only



## Combinations

**Interior variants:**

Pine with triple coat finish or white paint finish

## Variants

**Cladding variants:**

Grey aluminium, titanium zinc, copper or other cladding types and colours

**Pane variants:**

(--73) Toughened outer pane with clear and clean coating and laminated inner pane for additional safety


For more pane variants see section 8.

## Section 3.03.00


Products ▶ Roof windows ▶ Types ▶ GEL+VEA/B/C

# Technical data – GEL+VEA/B/C

Cross-section/  
measurements (mm)

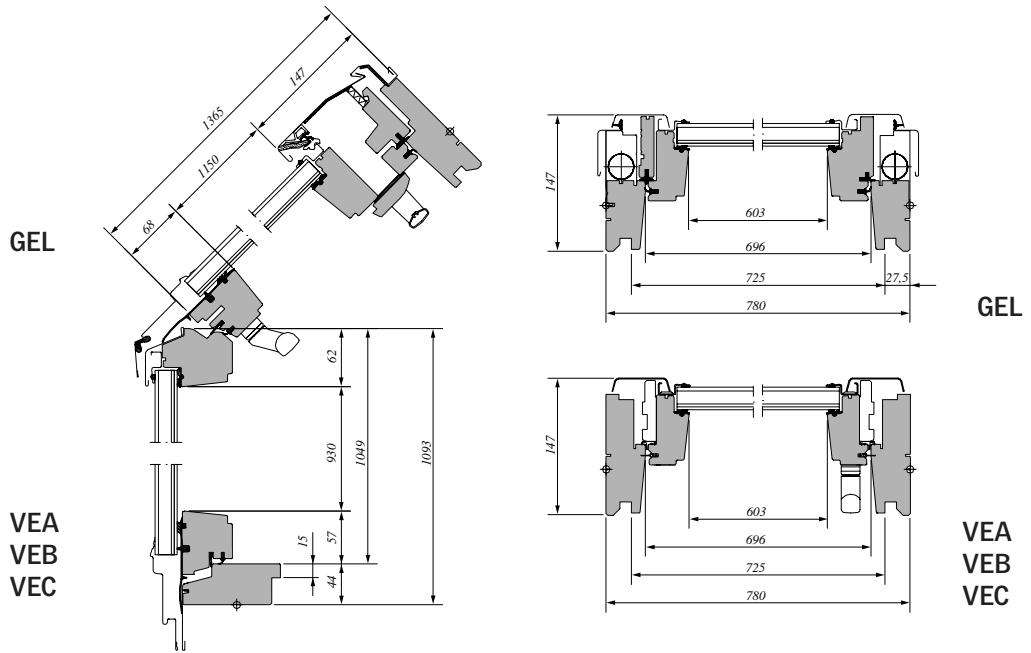

Sizes (cm)

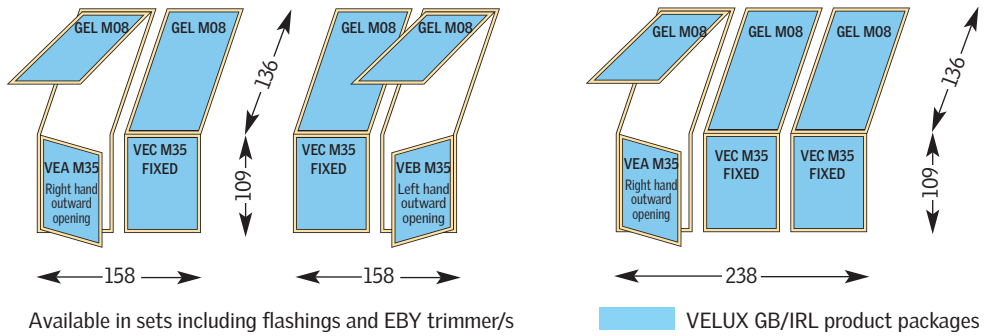

Technical data

	Size	M08	M35
Ventilation flap – free area [10 <sup>3</sup> mm <sup>2</sup> ]		4.3	–
Ventilation flap – equivalent area [10 <sup>3</sup> mm <sup>2</sup> ]*		3.7	–
Ventilation – open window [m <sup>2</sup> ]		0.89	0.64
Effective daylight area [m <sup>2</sup> ]	GEL VEA/B/C	0.69	0.56

\*Measured to EN 13141-1

Pane variant	--73	EN/ISO Standard
Thermal transmittance, U <sub>w</sub> [W/m <sup>2</sup> K]	1.4	EN ISO 12567-2
Sound insulation, R <sub>w</sub> [dB]	35	EN ISO 140-3/EN ISO 717-1
Air permeability	Class 3	EN 12207
Light transmittance, τ <sub>v</sub>	0.77	EN 410
Total solar energy transmittance, g	0.54	EN 410